



mFurnace™
Manufactured Home Electric Furnace

Specification Guide



Table of Contents

Nomenclature2

Features4

Physical Data.....4

Blower Performance5

Dimensions.....6

Thermostat Connections7

Wiring Diagram.....7

Electrical Data9



Product improvement is a continuous process at Advanced Distributor Products. Therefore, product specifications are subject to change without notice and without obligation on our part. Please contact your ADP representative or distributor to verify details.

© 2026 by Advanced Distributor Products. All rights reserved.

Furnace Nomenclature

AMH		E	4	D	10	B	2	N	1
Series AMH = ADP Mobile Home Furnace									Revision
Blower Speed E = 5-speed ECM motor									Coil Cabinet N = Not Included
Unit Size 2 = 2 Ton 3 = 3 Ton 4 = 4 Ton 5 = 5 Ton									Voltage 1 = 120 V, 60 Hz, 1 ph. ^[1] 2 = 208/240 V, 60 Hz, 1 ph.
Configuration D = Downflow									Line Voltage Connection S = Stripped Wires B = Circuit Breaker
Electric Heat 00 = No Heat 05 = 5.0 kW 07 = 7.5 kW 10 = 10 kW 12 = 12.5 kW 15 = 15 kW 20 = 20 kW		Available In: Size 2-5 Ton Size 2-5 Ton Size 2-5 Ton Size 2-5 Ton Size 3-5 Ton Size 3-5 Ton Size 4-5 Ton							

^[1] 120 V, 60 Hz supply voltage cannot be used with electric heat

Coil Cabinet Nomenclature

MH		C	D	L	S	23	
Series MH = Mobile Home							Height 18 = 18.00" 20 = 20.00" 23 = 23.25" 24 = 24.00" 28 = 28.00" 30 = 30.50" 36 = 36.00" 40 = 40.25"
Accessory Type C = Coil Cabinet F = Filter Grille							Top O = Open S = Solid
Airflow Direction D = Downflow U = Upflow							
Door Type L = Louvered S = Solid							

Coil Cabinet Model	Accessory Type	Airflow Direction	Door Type	Top	Height (in)	Depth (in)	Width (in)	Filter Size (Door)	Filter Size (Top)	Applicable M Series Coil sizes
MHCDLS23	Coil Cabinet	Downflow	Louvered	Solid	23.25	23.5	19.8	20x20x1 (qty 1)	N/A	Coil height upto 20"
MHCDSO23	Coil Cabinet	Downflow	Solid	Open	23.25	23.5	19.8	N/A	20x24x1 (qty 1)	
MHCDLO23	Coil Cabinet	Downflow	Louvered	Open	23.25	23.5	19.8	20x20x1 (qty 1)	20x24x1 (qty 1)	
MHCDLS30	Coil Cabinet	Downflow	Louvered	Solid	30.50	23.5	19.8	20x30x1 (qty 1)	N/A	Coil height upto 25"
MHCDSO30	Coil Cabinet	Downflow	Solid	Open	30.50	23.5	19.8	N/A	20x24x1 (qty 1)	
MHCDLO30	Coil Cabinet	Downflow	Louvered	Open	30.50	23.5	19.8	20x30x1 (qty 1)	20x24x1 (qty 1)	
MHCDLS40	Coil Cabinet	Downflow	Louvered	Solid	40.25	23.5	19.8	20x20x1 (qty 2)	N/A	All M Series Coil Height
MHCDSO40	Coil Cabinet	Downflow	Solid	Open	40.25	23.5	19.8	N/A	20x24x1 (qty 1)	
MHFDLO18	Filter Grille	Downflow	Louvered	Open	18.00	N/A	19.8	N/A	N/A	N/A
MHFDLO24	Filter Grille	Downflow	Louvered	Open	24.00	N/A	19.8	N/A	N/A	N/A
MHCUSO20	Coil Cabinet	Up-flow	Solid	Open	20.00	23.5	19.8	N/A	N/A	Coil height upto 17"
MHCUSO24	Coil Cabinet	Up-flow	Solid	Open	24.00	23.5	19.8	N/A	N/A	Coil height upto 21"
MHCUSO28	Coil Cabinet	Up-flow	Solid	Open	28.00	23.5	19.8	N/A	N/A	Coil height upto 25"
MHCUSO36	Coil Cabinet	Up-flow	Solid	Open	36.00	23.5	19.8	N/A	N/A	All M Series Coil Height



Filter Grille



**Coil Door
with Open
Top**



**Louvered
Door with
Solid Top**



**Louvered Door
with Open Top**



UpFlow

Application Features

- Standard footprint for installation in manufactured homes.
- Compatible with 2-5 Ton AC or HP systems.
- Factory configured for downflow, field convertible for up-flow.
- Electric heat available factory or field installed for 208/240 V models.
- Multiple coil cabinet and filter grille options available.
- Perfectly matches with ADP manufactured housing coils.
- Meets UL 60335-2-40 product requirements.

Cabinet Features

- Blower panel with handle and push-to-lock feature for easy access.
- Cabinet and door lined with high quality 5/8" foil faced insulation for quiet operation.
- Cabinet constructed of heavy-gauge, corrosion-resistant galvanized steel.
- Slide-out blower assemblies for easy access to blower motor.

Electrical Features

- 120 V or 208/240 V 60 Hz supply voltages available.
- 5-speed high-efficiency ECM motor.
- Terminal board with screw down connections for thermostat wiring.
- Fan time delay built-in (1 second on, 45 seconds off).
- Multiple knockout options for line voltage and thermostat connections.
- Blower door safety switch on all models.

Physical Data		Model			
		AMHE2D*	AMHE3D*	AMHE4D*	AMHE5D*
Nominal CFM Range		600 - 800	900 - 1100	1200 - 1400	1200 - 1800
Available Voltage		(120V, 60 Hz, 1 Ph), (208/240V, 60 Hz, 1 Ph)			
Maximum Electric Heat Available (kW)		10	15	20	20
Transformer Size & Type		40 VA, Class 2			
Blower Data 5-Speed High Efficiency ECM Motor (120 V)	Motor H.P.	1/3	1/2	3/4	3/4
	F.L.A @ 120 V	3.9	5.8	8.7	8.7
	Wheel (Diameter x Width)	10 x 9	10 x 9	10 x 9	11 x 9
Blower Data 5-Speed High Efficiency ECM Motor (240 V)	Motor H.P.	1/3	1/2	3/4	3/4
	F.L.A @ 240V	2.6	3.9	5.8	5.8
	Wheel (Diameter x Width)	10 x 9	10 x 9	10 x 9	11 x 9
Approximate Packaged Weight (lbs)		85	85	85	100


Blower Performance

Unit Size	Tap	Airflow (CFM) vs. External Static Pressure (inches H ₂ O)									
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
AMHE2D	1	368	317	244	196	197	196	196	197	196	196
	2	522	470	433	379	339	339	340	260	261	260
	3^	711	675	634	604	565	525	493	449	450	449
	4#	837	801	774	738	705	676	645	614	607	605
	5*	921	886	862	827	794	770	739	713	709	654
AMHE3D	1	414	344	268	202	202	201	201	201	202	202
	2	760	701	659	613	568	522	486	447	447	446
	3^	1063	956	916	873	840	803	767	735	720	672
	4#	1157	1060	1005	963	926	900	867	840	807	805
	5*	1213	1142	1078	1035	997	961	936	905	881	848
AMHE4D	1	486	408	333	253	216	216	216	216	216	216
	2	1046	1010	969	877	824	780	734	690	655	615
	3^	1382	1347	1313	1286	1244	1194	1119	1068	1034	993
	4#	1426	1389	1353	1318	1289	1241	1179	1111	1068	1034
	5*	1501	1474	1443	1411	1377	1339	1304	1243	1178	1134
AMHE5D	1	858	798	731	661	596	536	492	450	449	449
	2	1053	1015	962	904	848	790	738	693	643	639
	3	1202	1160	1116	1068	1013	965	911	861	818	810
	4#^	1343	1318	1281	1240	1196	1160	1106	1060	1014	1008
	5*	1826	1799	1790	1761	1722	1677	1640	1594	1544	1494


Notes :

1. All data is given while air handler is operating with a dry coil and air filter installed.
2. Speeds marked bold with * are the factory speed settings for Cooling.
3. Speeds marked bold with # are the factory speed settings for Heating.
4. Speeds marked bold with ^ are minimum speed tap allowed for electric heating.
5. Different speeds can be set for cooling mode; see installation instructions for changing cooling speeds.
6. Speed tap 4 is the maximum allowed for electric heating and heat pump operation in AMHE5D models.
7. AMHE3D model can be configured to run at speed tap 2 with a maximum of 10 kW electric heat.
8. AMHE5D model can be configured to run at speed tap 3 with a maximum of 15 kW electric heat.


Dimensions

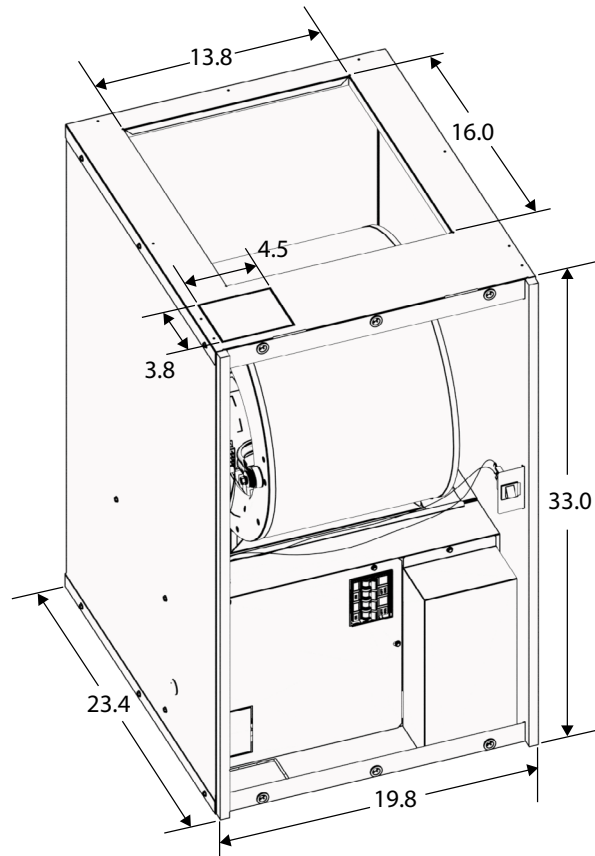



Wiring Diagram 208/240 Volt

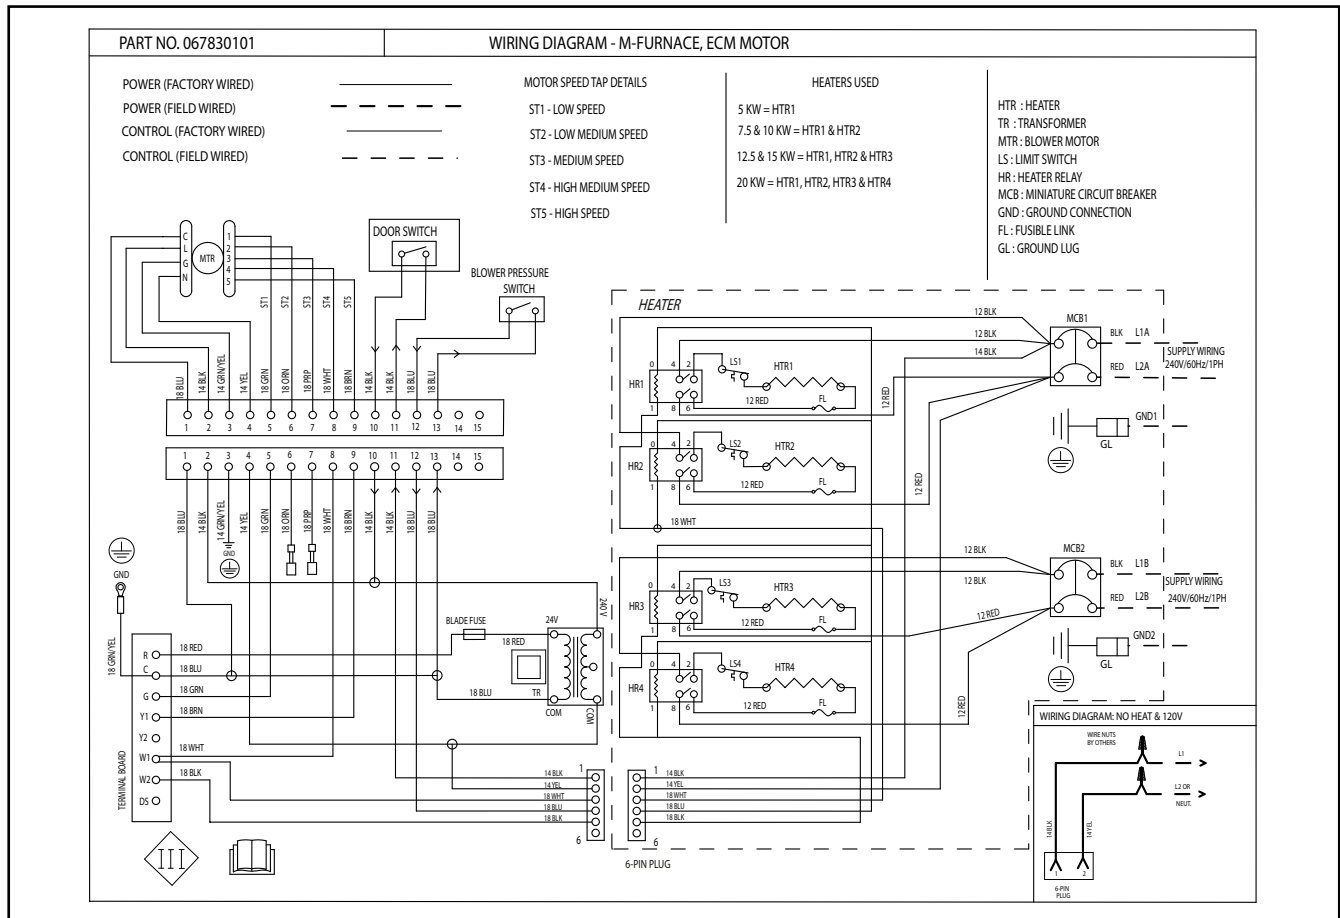

Wiring Diagram 120 Volt

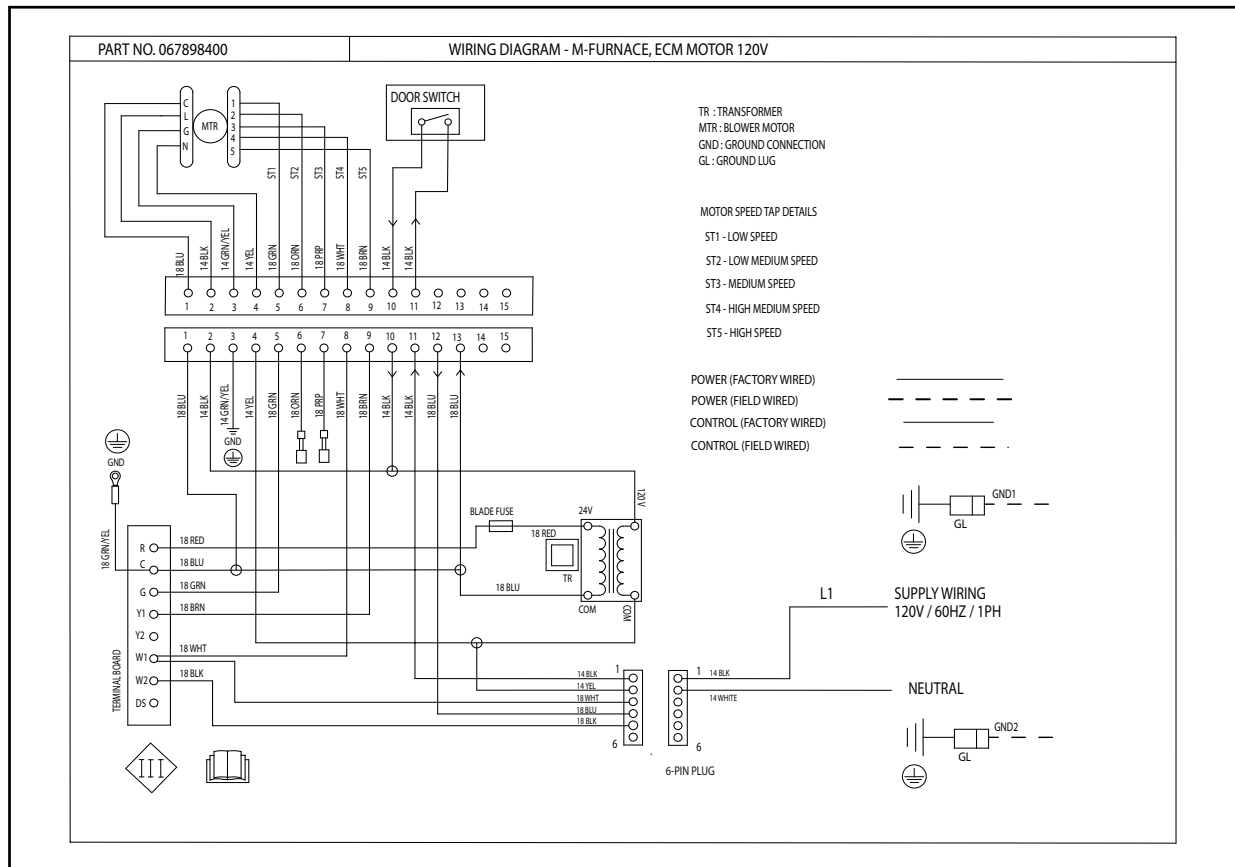

Thermostat Connections

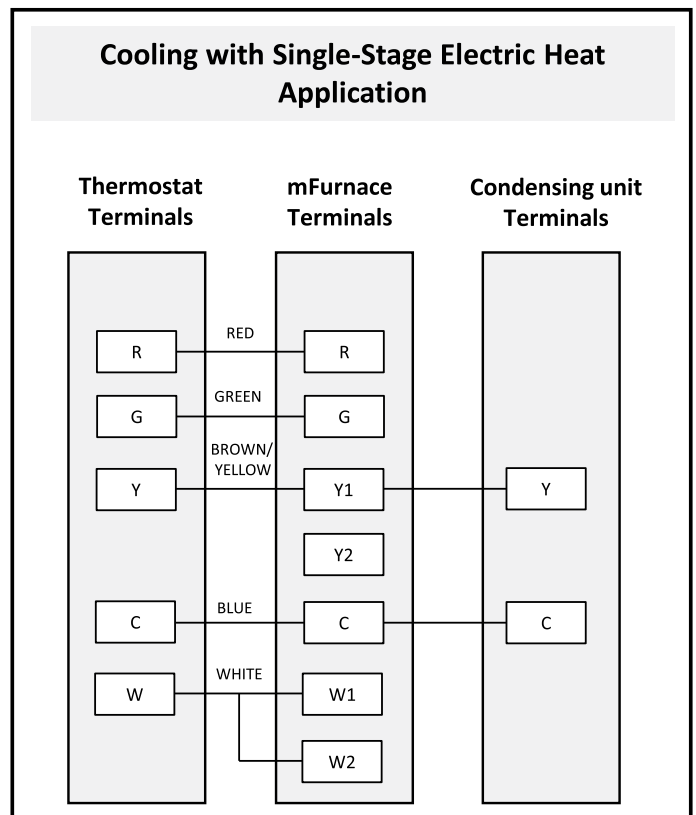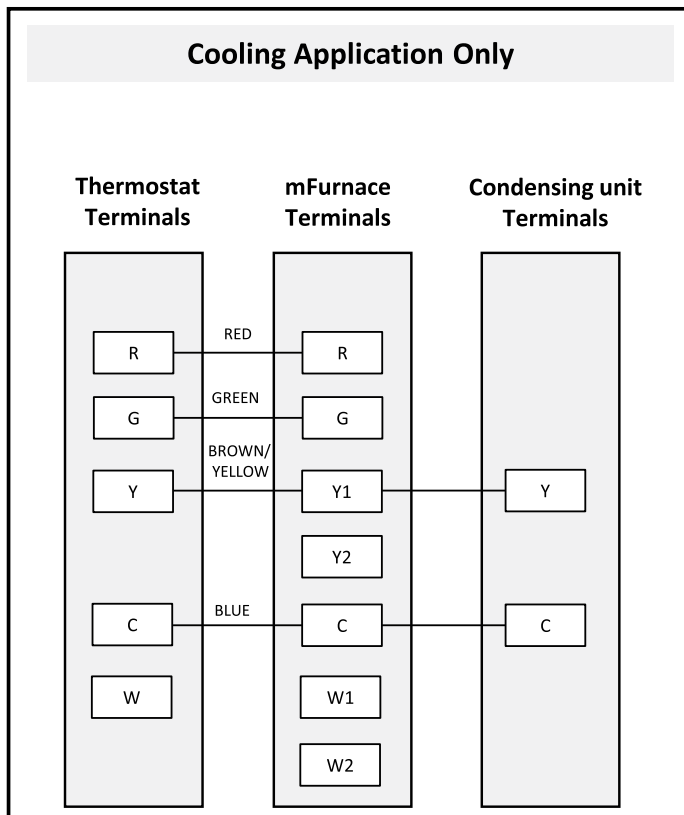


Note:


- All thermostat connections are NEC class 2 wiring.
- Connect common wire from the furnace to the thermostat only if required.

Thermostat Connections


Heat Pump with Single-Stage Electric Heat Application

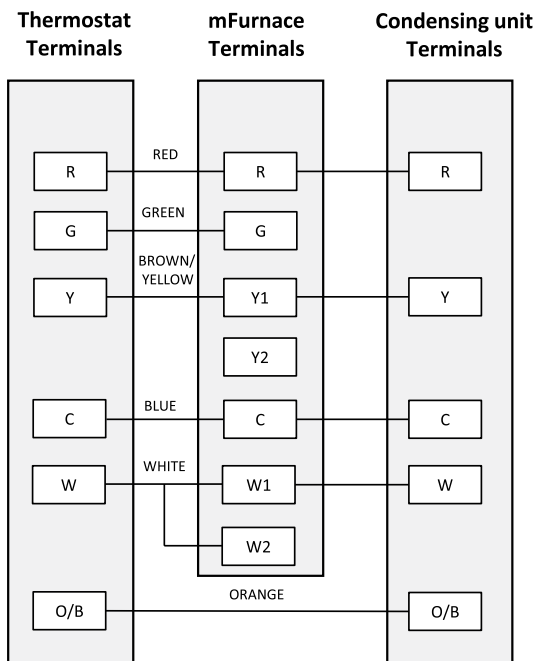


Cooling with Two-Stage Electric Heat Application

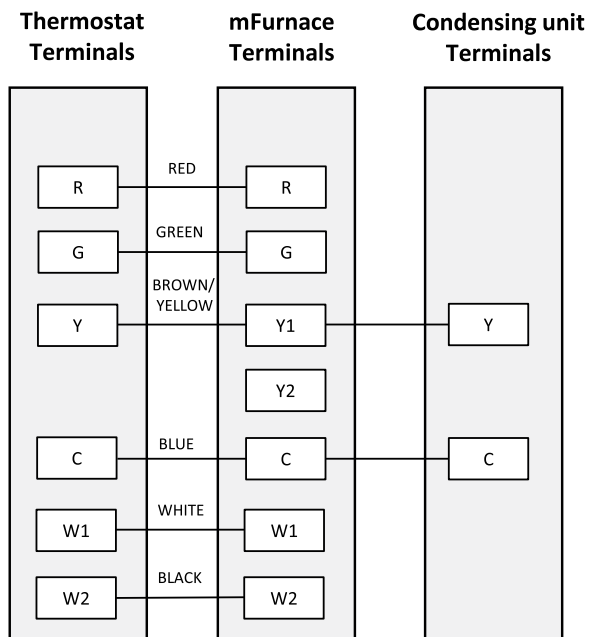

Heat Pump with Two-Stage Electric Heat Application

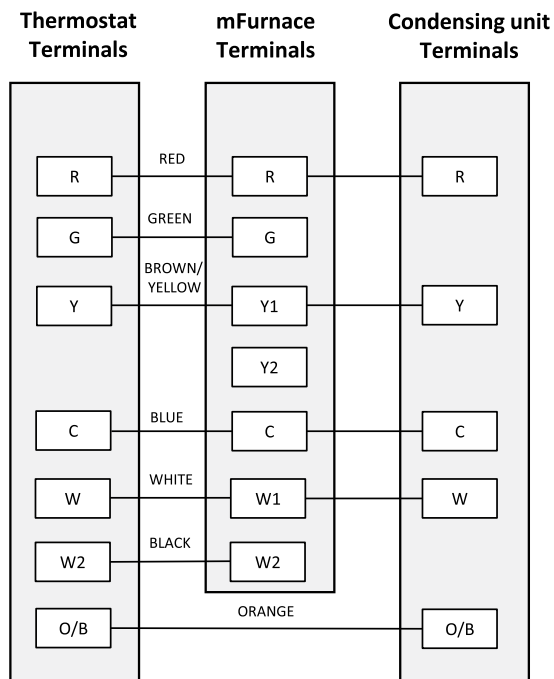

Heating Application Only

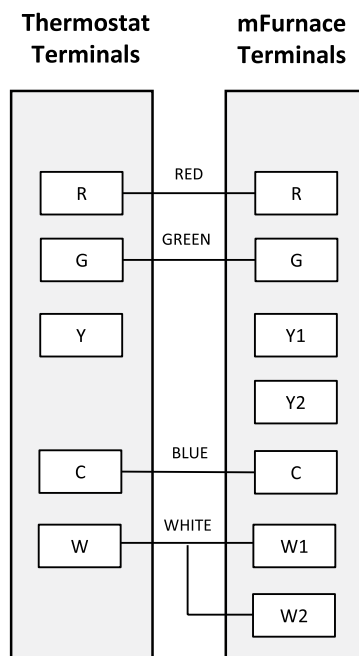

Note:

- All thermostat connections are NEC class 2 wiring.
- Connect common wire from the furnace to the thermostat only if required.

Electrical Data: 120 V, ECM Motor, No Electric Heat

Unit Size	Total Heat Capacity	Heating Capacity per circuit		Circuit	Blower Amps (A)	Total Current, (A)	Minimum Circuit Ampacity (A)	Maximum Circuit Breaker Size (A)
		kW	BTUH					
		120 V	120 V		120 V	120 V	120 V	120 V
2	0	0	0	1	3.9	3.9	4.9	15
3	0	0	0	1	5.8	5.8	7.3	15
4	0	0	0	1	8.7	8.7	10.9	15
5	0	0	0	1	8.7	8.7	10.9	15

Electrical Data: 240 V, ECM Motor, Electric Heat

Unit Size	Total Heat Capacity	Heating Capacity per circuit		Circuit	Blower Amps (A)		Total Current (A)		Minimum Circuit Ampacity (A)		Maximum Circuit Breaker size ^[2] (A)	
		kW	BTUH		208 V	208 V	208 V	208 V	208 V	240 V	208 V	240 V
		240 V ^[1]	240 V ^[1]									
2	0	0	0	1	2.7	2.6	2.7	2.6	3.4	3.3	15	15
	5	5	17061	1	2.7	2.6	20.8	23.4	25.9	29.3	30	30*
	7.5	7.5	25591	1	2.7	2.6	29.8	33.9	37.2	42.3	40	45
	10	10	34121	1	2.7	2.6	38.8	44.3	48.5	55.3	50	60
3	0	0	0	1	3.9	3.9	3.9	3.9	4.9	4.9	15	15
	5	5	17061	1	3.9	3.9	22	24.7	27.4	30.9	30	35
	7.5	7.5	25591	1	3.9	3.9	31	35.2	38.7	43.9	40	45
	10	10	34121	1	3.9	3.9	40	45.6	50	57	50	60
	12.5	8.3	28321	1	3.9	3.9	33.9	38.5	42.3	48.1	45	50
		4.2	14331	2	0	0	15.2	17.5	19	21.9	20	25
	15	10	34121	1	3.9	3.9	40	45.6	50	57	50	60
		5	17061	2	0	0	18.1	20.8	22.6	26	25	30
4 & 5	0	0	0	1	6	5.8	6	5.8	7.5	7.3	15	15
	5	5	17061	1	6	5.8	24.1	26.6	30.1	33.3	35	35
	7.5	7.5	25591	1	6	5.8	33.1	37.1	41.4	46.3	45	50*
	10	10	34121	1	6	5.8	42.1	47.5	52.6	59.3	60	60
	12.5	8.3	28321	1	6	5.8	36	40.4	45	50.5	45	60*
		4.2	14331	2	0	0	15.2	17.5	19	21.9	20	25
	15	10	34121	1	6	5.8	42.1	47.5	52.6	59.3	60	60
		5	17061	2	0	0	18.1	20.8	22.6	26	25	30
	20	10	34121	1	6	5.8	42.1	47.5	52.6	59.3	60	60
		10	34121	2	0	0	36.1	41.7	45.1	52.1	50	60

^[1] For 208 volt use 0.751 correction factor for kW & BTUH.

^[2] Verify breaker sizing based on minimum circuit ampacity.

* Circuit Breaker supplied with heat kit must be changed.

