

## Specification Guide

# Low Profile Multi-Position Air Handlers For Lennox



Contents	Page
Product Features	2
Physical Data	2
Nomenclature	3
Blower Performance	4
Electrical Data	5
Sound Data	6
Dimensions	7



Product improvement is a continuous process at Advanced Distributor Products. Therefore, product specifications are subject to change without notice and without obligation on our part. Please contact your ADP representative or distributor to verify details.

© by **Advanced Distributor Products**. All rights reserved.

## New Enhanced Features

- Brackets to hold coil assembly. When installing unit in horizontal position coil assembly won't move.
- Glued foil faced insulation, with cabinet flanges for better securing.
- Downflow kit available for field installation.
- Only four (4) screws to remove blower panel, making it easier to service.
- Separate door panels with flanges, sturdier design.
- Cabinet with flanges on all sides, adding cabinet rigidity. Much stronger unit. Improved air leakage.
- Additional wire strip, to better secure insulation when the blower is operating.
- Two independent panels, make it easy to clean coil. When refrigerant lines are installed, you still have access to the coil.

## Air Handler Features

- Suitable for use with R-22 and R410A.
- Rifled Copper Tubing.
- Patented lance fin design.
- Ratings in conformity with AHRI Standard 210.
- ETL lab tested 2% or less cabinet air leakage for better efficiency.
- 120 V 60 Hz and 208/240 V 60 Hz supply voltages available.
- 5-speed high efficiency ECM motor available.
- 40 VA control voltage transformer.
- Dynamically balanced blowers for quiet vibration free operation.
- Dual 3/4" FPT condensate drains.
- Drain pans are molded of corrosion proof engineering polymer.
- Piston, or non-bleed HP-A/C expansion valve available factory installed. Expansion valves also available as a kit for field installation (all screw-on connections).
- All drain pans have Microban® protection, which inhibits the growth of mold and mildew that can cause odors and staining.
- Refrigerant connections are 3/8" ODF liquid and 3/4" ODF (18 & 24) or 7/8" ODF (25, 30, 31, 36 - 60) suction.
- Cabinet constructed of painted steel to prevent corrosion. Lined with high quality 5/8" foil faced insulation.
- Electrical connections can be made on top, right or left side.
- Electric heat available factory installed or in kit form for field installation. Plug in connections simplify installation of kits.
- Filter rack (no filter) - built into every air handler.
- Easy to follow wiring diagrams on all air handlers.
- Coils are air pressure tested at 500psi, leak tested with helium, sealed with rubber plugs, and then charged with dry air.
- Fan time delay factory installed.
- HYDROTEC™ drain pan holds less water and reduces the amount of mold and mildew that grows in the pan.

## Physical Data

		Unit Size									
		18	24	25	30	31	36	37	42	48	60
<b>Available Voltage</b> <sup>[1]</sup>		208/240 V, 60 Hz, 1 ph or 120 V, 60 Hz, 1 ph.									
<b>Maximum Elec. Heat Available (kW)</b>		10	10	10	15	15	15	15	20	20	20
<b>Transformer Size and Type</b>		40 VA, Class 2									
<b>Blower Data:</b> 3-Speed PSC Motor (120V)	<b>Motor H. P.</b>	1/5	1/3	1/3	1/3	1/3	1/3	1/3	1/2	3/4	3/4
	<b>F. L. A. @ 120 V</b>	2.0	3.2	3.2	3.2	5.3	5.3	5.3	8.5	7.5	10.5
	<b>Wheel (dia x wid)</b>	9x6	9x6	9x6	9x6	9x6	10x8	9x6	10x8	10x8	10x10
<b>Blower Data:</b> 3-Speed PSC Motor (240V)	<b>Motor H. P.</b>	1/5	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/2	1/2
	<b>F. L. A. @ 240 V</b>	1.1	1.6	1.9	1.9	2.6	2.6	1.9	1.9	3.9	3.9
	<b>Wheel (dia x wid)</b>	9x6	9x6	10x8	10x8	12x8	10x8	12x8	12x8	11x10	11x10
<b>Blower Data:</b> 5-Speed High Eff. ECM Motor	<b>Motor H. P.</b>	1/3	1/3	1/2	1/2	1/2	1/2	1/2	1/2	3/4	1
	<b>F. L. A. @ 240 V</b>	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.2	4.6
	<b>Wheel (dia x wid)</b>	9x6	9x6	10x8	10x8	10x8	10x8	10x8	10x8	10x10	10x10
<b>Nominal CFM</b>		600	800	800	1000	1000	1200	1200	1400	1600	2000
<b>Air Filter Size (in)</b>		12x20	12x20	16x20	16x20	18x25	16x20	18x25	18x25	18x25	18x25
<b>Refrigerant Conn. (IDS) Suction (in)</b>		3/4	3/4	7/8	7/8	7/8	7/8	7/8	7/8	7/8	7/8
<b>Refrigerant Conn. (IDS) Liquid (in)</b>		3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
<b>R-22 Piston Size (in)</b> (for replacement only)		.053	.059	.059	.067	.067	.073	.073	.080	.084	.093
<b>R-410A Piston Size (in)</b>		.049	.053	.053	.059	.059	.067	.067	.073	.076	.093
<b>Approx. Weight lbs (base unit w/o heat)</b>		80	80	105	105	155	105	155	155	155	155

[1] 120 V, 60 Hz supply voltage cannot be used with electric heat, 5-Speed high efficiency ECM motor.

# Nomenclature

**L** **S** **M** **24** **2** **22E** - **S** **05** **2**

**L** = Painted cabinet

**BLOWER MOTOR TYPE**

**S** = Constant speed blower  
**E** = 5-speed ECM motor

**AIRFLOW CONFIGURATION**

**M** = Multi-position  
 (upflow, left or right horizontal)

**UNIT SIZE (NOMINAL MBTUH)**

18, 24, 25, 30, 31, 36, 37, 42, 48, 60

**METERING DEVICE**

**0** = No Cooling Coil  
**1** = Piston (R-410A)  
**9** = Non Bleed HP-A/C TXV Valve (R-410a)

**SLAB NUMBER**

**VOLTAGE**

**1** = 208/240 V, 60 Hz, 1 ph. (ECM only)  
**2** = 240/208v, 1 ph. 60 hz w/Time Delay  
**4** = 120 V, 60 Hz, 1 ph. (PSC only) <sup>[1]</sup>

**HEAT**

**Note:** Maximum 10 Kw per electrical supply circuit

		<b>SIZE</b>	<b>Kw Available</b>
<b>00</b>	= 0 Kw ELEC.		
<b>05</b>	= 5 Kw ELEC.	<b>18</b>	5, 7.5, 10
<b>07</b>	= 7.5 Kw ELEC.	<b>24 &amp; 25</b>	5, 7.5, 10
<b>10</b>	= 10 Kw ELEC.	<b>30 &amp; 31</b>	5, 7.5, 10, 15
<b>15</b>	= 15 Kw ELEC.	<b>36 &amp; 37</b>	5, 7.5, 10, 15
<b>20</b>	= 20 Kw ELEC.	<b>42</b>	5, 7.5, 10, 15
		<b>48</b>	5, 7.5, 10, 15, 20
		<b>60</b>	5, 7.5, 10, 15, 20

**LINE VOLTAGE CONNECTIONS/CIRCUIT PROTECTION**

	<b>Amount of Heat</b>					
	0	5	7.5	10	15	20
S = Stripped Wire	#	#				
B = Circuit Breaker		O	O	O	#	#

# = Standard      O = Optional

[1] 120 V, 60 Hz supply voltage cannot be used with electric heat, 5-speed high efficiency ECM motor.

## Blower Performance: 3-Speed PSC Motor

- All data is given while air handler is operating with a dry coil and air filter installed.
- Speeds marked **\*bold with asterisk** are the factory speed settings for both heating and cooling.
- Heating speeds should not be reduced below factory setting.
- Different speeds can be set for cooling mode; see installation instructions for changing cooling speeds.
- For downflow operation (with field installed kit), use the next highest speed setting available. If set to high speed from the factory, use high speed for downflow.

### 208/240 Volt 3-Speed PSC Motor

		Airflow (CFM) vs. External Static Pressure (inches W.C.)				
Size	Speed	0.10	0.20	0.30	0.40	0.50
18	Low	505	499	487	434	397
	<b>*Med</b>	653	634	625	600	512
	High	891	853	812	778	733
24	Low	663	624	583	578	562
	<b>*Med</b>	902	864	822	792	744
	High	1159	1097	1031	960	893
25	<b>*Low</b>	867	839	803	780	733
	Med	1044	1015	991	941	889
	High	1260	1234	1200	1149	1098
30	Low	867	839	803	780	733
	<b>*Med</b>	1044	1015	991	941	889
	High	1260	1234	1200	1149	1098
31	<b>*Low</b>	1143	1112	1081	1047	1015
	Med	1268	1233	1186	1165	1133
	High	1415	1390	1352	1314	1260
36	Low	1143	1112	1081	1047	1015
	<b>*Med</b>	1268	1233	1186	1165	1133
	High	1415	1390	1352	1314	1260
37	<b>*Low</b>	1318	1299	1270	1210	1147
	Med	1444	1409	1374	1294	1220
	High	1712	1645	1544	1453	1328
42	Low	1318	1299	1270	1210	1147
	<b>*Med</b>	1444	1409	1374	1294	1220
	High	1712	1645	1544	1453	1328
48 **	<b>*Low</b>	1764	1709	1652	1563	1418
	Med	1984	1884	1780	1683	1509
	High	2031	1959	1832	1725	1617
60	Low	1764	1709	1652	1563	1418
	Med	1984	1884	1780	1683	1509
	<b>*High</b>	2031	1959	1832	1725	1617

### 120 Volt 3-Speed PSC Motor

		Airflow (CFM) vs. External Static Pressure (inches W.C.)				
Size	Speed	0.10	0.20	0.30	0.40	0.50
18	Low	431	424	425	403	385
	<b>*Med</b>	645	645	645	641	597
	High	804	804	804	793	765
24	Low	530	525	519	507	483
	<b>*Med</b>	925	915	875	823	736
	High	1189	1110	1016	917	826
25	<b>*Low</b>	998	956	905	844	770
	Med	1045	1004	962	871	785
	High	1089	1036	980	905	826
30	Low	998	956	905	844	770
	<b>*Med</b>	1045	1004	962	871	785
	High	1089	1036	980	905	826
31	Low	1008	1004	972	925	867
	<b>*Med</b>	1190	1150	1100	1040	970
	High	1250	1200	1140	1070	995
36	Low	945	930	912	869	793
	<b>*Med</b>	1150	1145	1123	1166	1004
	High	1291	1291	1285	1277	1200
37	Low	1008	1004	972	925	867
	<b>*Med</b>	1190	1150	1100	1040	970
	High	1250	1200	1140	1070	995
42	<b>*Low</b>	1393	1378	1366	1246	1167
	Med	1603	1592	1575	1540	1443
	High	1811	1811	1805	1744	1674
48	Low	1393	1378	1366	1246	1167
	<b>*Med</b>	1603	1592	1575	1540	1443
	High	1811	1811	1805	1744	1674
60	Low	1583	1583	1583	1567	1551
	<b>*Med</b>	1972	1972	1968	1882	1819
	High	2169	2146	2096	2004	1908

\*\* Use only low speed on heating for unit size 48 with 5kW electric heat.

## Blower Performance: 5-Speed High Efficiency ECM Motor

- All data is given while air handler is operating with a dry coil and air filter installed.
- Speeds marked **\*bold with asterisk** are the factory speed settings for both heating and cooling.
- Heating speeds should not be reduced below factory setting.
- Different speeds can be set for cooling mode; see installation instructions for changing cooling speeds.
- For downflow operation (with field installed kit):
  - If factory-set speed tap 3 is desirable for your application, use speed tap 5 for downflow.
  - If speed tap 2 is desirable for your application, use speed tap 3 in downflow.

		Airflow (CFM) vs. External Static Pressure (inches W.C.)							
Size	Tap	0.10	0.20	0.30	0.35	0.40	0.45	0.50	0.60
18	1	492	448	393	361	361	333	307	273
	2	513	471	420	414	384	357	325	318
	<b>*3</b>	667	641	615	605	596	577	567	560
	4	705	673	665	648	630	621	603	590
	5	721	689	673	656	639	629	612	590
24, 25	1	732	627	590	581	571	545	536	525
	2	671	634	594	578	573	546	493	480
	<b>*3</b>	892	859	832	828	818	797	790	775
	4	911	866	839	832	825	818	804	760
	5	924	886	846	832	825	818	797	780
30, 31	1	871	830	778	722	671	635	625	586
	2	906	859	809	779	715	689	654	635
	<b>*3</b>	1085	1070	1048	1036	1024	1001	989	975
	4	1125	1103	1087	1059	1047	1024	1012	983
	5	1176	1146	1114	1098	1081	1059	1047	1029
36, 37	1	882	887	826	804	766	760	755	695
	2	1082	1037	1025	1002	990	959	921	881
	<b>*3</b>	1270	1250	1238	1228	1214	1189	1179	1162
	4	1290	1275	1265	1246	1236	1227	1212	1172
	5	1335	1315	1301	1287	1278	1259	1240	1225
42	1	1008	907	861	832	803	772	717	671
	2	1292	1243	1202	1192	1171	1149	1127	1070
	<b>*3</b>	1447	1430	1404	1377	1359	1340	1322	1283
	4	1534	1502	1476	1459	1433	1416	1398	1362
	5	1559	1519	1502	1477	1460	1434	1417	1381
48	1	1585	1494	1320	1252	1210	1151	1120	1088
	2	1510	1463	1414	1389	1363	1324	1256	1228
	<b>*3</b>	1675	1633	1579	1556	1545	1510	1487	1451
	4	1737	1697	1655	1633	1612	1590	1568	1545
	5	1781	1731	1679	1658	1637	1615	1593	1571
60	1	1394	1342	1288	1251	1172	1109	1077	1025
	2	1722	1666	1623	1594	1564	1534	1518	1471
	<b>*3</b>	2083	2048	2013	1990	1972	1947	1929	1885
	4	2179	2135	2101	2079	2056	2039	2021	1937
	5	2209	2166	2122	2101	2057	2058	2047	1956

## Electrical Data: 3 Speed PSC Motor

### No Electric Heat

Unit Size	Electric Heating Capacity		Blower Amps			Minimum Circuit Ampacity			Circuit Breaker Amps per Stage	
	kW <sup>[1]</sup>	BTUH	120 V	208 V	240 V	120 V	208 V	240 V	1	2
	240 V <sup>[2]</sup>	240 V <sup>[2]</sup>								
18	0	0	2.0	1.2	1.1	2.5	1.5	1.4	15	-
24	0	0	3.2	1.7	1.6	4.0	2.1	2.0	15	-
25, 30	0	0	3.2	2.0	1.9	4.0	2.5	2.4	15	-
31, 36	0	0	5.3	2.7	2.6	6.6	3.4	3.3	15	-
37, 42	0	0	8.5	2.0	1.9	10.6	2.5	2.4	15	-
48	0	0	7.5	4.1	3.9	9.4	5.1	4.9	15	-
60	0	0	10.5	4.1	3.9	13.1	5.1	4.9	15	-

### With Electric Heat

Unit Size	Electric Heating Capacity		Blower Amps		Minimum Circuit Ampacity		Circuit Breaker Amps per Stage	
	kW <sup>[1]</sup>	BTUH	208 V	240 V	208 V	240 V	1	2
	240 V <sup>[2]</sup>	240 V <sup>[2]</sup>						
18	5	17,065	1.2	1.1	24.0	27.4	30	-
	7.5	25,598	1.2	1.1	35.3	40.4	45	-
	10	34,130	1.2	1.1	46.6	53.5	60	-
24	5	17,065	1.7	1.6	24.7	28.0	30	-
	7.5	25,598	1.7	1.6	36.0	41.1	45	-
	10	34,130	1.7	1.6	47.2	54.1	60	-
25	5	17,065	2.0	1.9	25.1	28.4	30	-
	7.5	25,598	2.0	1.9	36.4	41.4	45	-
	10	34,130	2.0	1.9	47.6	54.5	60	-
30	5	17,065	2.0	1.9	25.1	28.4	30	-
	7.5	25,598	2.0	1.9	36.4	41.4	45	-
	10	34,130	2.0	1.9	47.6	54.5	60	-
	<b>15</b>	51,195	2.0	1.9	70.2	80.5	60	30
31, 36	5	17,065	2.7	2.6	26.0	29.3	30	-
	7.5	25,598	2.7	2.6	37.3	42.3	45	-
	10	34,130	2.7	2.6	48.6	55.3	60	-
	<b>15</b>	51,195	2.7	2.6	71.1	81.4	60	30
37, 42	5	17,065	2.0	1.9	25.1	28.4	30	-
	7.5	25,598	2.0	1.9	36.4	41.4	45	-
	10	34,130	2.0	1.9	47.6	54.5	60	-
	<b>15</b>	51,195	2.0	1.9	70.2	80.5	60	30
48, 60	7.5	25,598	4.1	3.9	39.0	43.9	45	-
	10	34,130	4.1	3.9	50.3	57.0	60	-
	<b>15</b>	51,195	4.1	3.9	72.9	83.0	60	30
	<b>20</b>	68,260	4.1	3.9	95.4	109.0	60	60

[1] kW packages in **bold italics** require and include circuit breakers; circuit breakers are optional for others.

[2] For 208 volt use 0.751 correction factor for kW & BTUH.

# Electrical Data: 5-Speed High Efficiency ECM Motor

## No Electric Heat

Unit Size	Elec. Heating Capacity		Blower Amps		Minimum Circuit Ampacity		Circuit Breaker Amps per Stage	
	kW <sup>[1]</sup>	BTUH	208 V	240 V	208 V	240 V	1	2
	240 V <sup>[2]</sup>	240 V <sup>[2]</sup>						
18, 24, 25	0	0	3.2	3.0	4.0	3.8	15	-
30, 31, 36, 37, 42	0	0	3.2	3.0	4.0	3.8	15	-
48	0	0	3.4	3.2	4.2	4.0	15	-
60	0	0	4.9	4.6	6.1	5.8	15	-

## With Electric Heat

Unit Size	Elec. Heating Capacity		Blower Amps		Minimum Circuit Ampacity		Circuit Breaker Amps per Stage <sup>[3]</sup>	
	kW <sup>[1]</sup>	BTUH	208 V	240 V	208 V	240 V	1	2
	240 V <sup>[2]</sup>	240 V <sup>[2]</sup>						
18, 24, 25	5	17,065	3.2	3.0	26.5	29.8	30	-
	7.5	25,598	3.2	3.0	37.8	42.8	45	-
	10	34,130	3.2	3.0	49.1	55.8	60	-
30, 31, 36, 37, 42	5	17,065	3.2	3.0	26.5	29.8	30	-
	7.5	25,598	3.2	3.0	37.8	42.8	45	-
	10	34,130	3.2	3.0	49.1	55.8	60	-
	<b>15</b>	51,195	3.2	3.0	71.7	81.9	60	30
48	5	17,065	3.4	3.2	26.8	30.0	30	-
	7.5	25,598	3.4	3.2	38.1	43.1	45	-
	10	34,130	3.4	3.2	49.4	56.1	60	-
	<b>15</b>	51,195	3.4	3.2	71.9	82.1	60	30
	<b>20</b>	68,260	3.4	3.2	94.5	108.2	60	60
60	7.5	25,598	4.9	4.6	39.9	44.8	45	-
	10	34,130	4.9	4.6	51.2	57.8	60	-
	<b>15</b>	51,195	4.9	4.6	73.8	83.9	60	30
	<b>20</b>	68,260	4.9	4.6	96.3	109.9	60	60


[1] kW packages in **bold italics** require and include circuit breakers; circuit breakers are optional for others.

[2] For 208 volt use 0.751 correction factor for kW & BTUH.

[3] Listed circuit breaker size is for 240V applications. For 208V verify breaker sizing based on min. circuit ampacity.

# Dimensions

Air Handler Size	A (in)	B (in)	C (in)	Supply Duct Opening		Return Duct Opening	
				Depth (in)	Width (in)	Depth (in)	Width (in)
18, 24	36	22	15	17	13	20.35	12.20
25, 30, 36	41	22	18 1/2	17	16.5	20.35	16.20
31, 37, 42, 48, 60	48	26	21 7/8	21	20	24.60	20.08

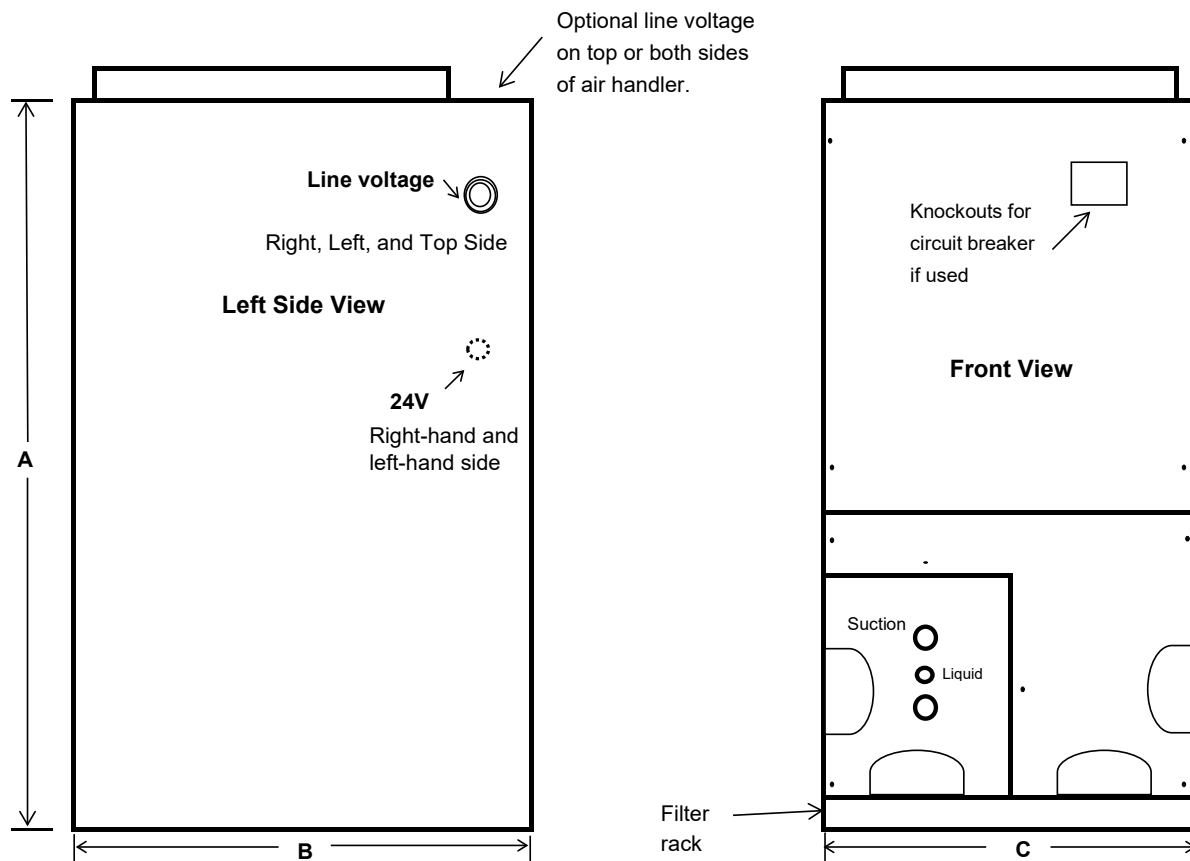

## Estimated Sound Power Level (dBA)

Unit Size	CONDITIONS			Octave Band Center Frequency*							
	CFM	External Static Pressure	Motor RPM	63	125	250	500	1000	2000	4000	8000
18	590	0.30	1075	60	66	56	52	44	40	35	29
24	802	0.30	1075	61	67	57	53	46	41	36	30
25,30	1000	0.30	1075	62	68	57	54	47	42	37	31
31,36	1200	0.30	1075	62	68	58	54	47	42	37	31
37,42	1616	0.30	1075	63	69	59	55	48	43	38	32
48	1840	0.30	1075	63	69	59	55	49	44	38	33
60	1840	0.30	1075	64	69	60	56	49	44	39	34

\* Estimated sound power levels have been derived using the method described in the 1987 ASHRAE HVAC Systems & Applications Handbook, Chapter 52, p. 52.7.

